



Powerwashers

Portable, mobile and autonomous high pressure washers



Portable
p. 4

Mobile electric
p. 6

Mobile petrol and
diesel
p. 9

Autonomous
trolley
p. 14

Trailer cold water
p. 16

Silent trailer cold
water
p. 20

Trailer hot water
p. 22

Accessories
p. 24



A wide range of high pressure washers for industrial use

For more than 40 years, our partner in Great Britain has designed and manufactured high pressure washers for industrial use, available in portable or mobile models with external power, or autonomous on a light trolley or trailer, carrying a 125 liters water tank for trolleys (i.e. approximately 15 minutes of autonomy) and from 700 to 940 liters for trailers (i.e. approximately 1h to 1h30 of autonomy).

The self-contained washers sit on sturdy tubular frames, with three secure lifting points and hose options at the front or rear of the trailer. The large capacity tanks are equipped with a deflector for safe road transport. The pressure is adjustable on all models. For work in urban areas, quiet soundproof models are also available.

Our partner has developed accessories allowing diversification of use: surface cleaning, spraying for dust control and odor reduction, pipe cleaning, watering, etc.

All models are available in a wide choice of colors, allowing you to match the colors of your company and your logo.





Portable

15KPL

Characteristics

Max pressure:	103 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GP200, pull start and low oil alert
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	8 m of 3/8" braided hose fitted with couplings and lance 1 m
Weight and dimensions:	29.5 kg 625 mm x 430 mm x 420 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
House / Garden cleaning

Options

4.50 m suction hose
Transport trolley kit



15KPJ

Characteristics

Max pressure:	103 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GP200, pull start and low oil alert
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	4.5 m of ½" suction hose fitted with suction strainer
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	34 kg 625 mm x 430 mm x 420 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
House / Garden cleaning



20KPS

Characteristics

Max pressure:	140 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GP200, pull start and low oil alert
Drive:	Industrial gearbox 2:1
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	10 m of 3/8" braided hose fitted with couplings
Weight and dimensions:	34 kg 625 mm x 430 mm x 420 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
House / Garden cleaning





Mobile electric

10KEL

Characteristics

Max pressure:	66 BAR
Flow rate:	11.4 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	110V single phase – cable 6 m – switch ON/OFF
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	8 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	58.5 kg 700 mm x 620 mm x 530 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning

Options

4.50 m suction hose



14KEL

Characteristics

Max pressure:	100 BAR
Flow rate:	11.4 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	240V single phase – cable 6 m – switch ON/OFF
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	8 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	61.5 kg 700 mm x 620 mm x 530 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
House / Garden cleaning

Options

4.50 m suction hose



14KE

Characteristics

	Improved version of the 14KEL with dynamic hose reel with stainless steel shaft and rotating coupling
Max pressure:	100 BAR
Flow rate:	11.4 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	240V single phase – cable 6 m – switch ON/OFF
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	8 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	61.5 kg 700 mm x 620 mm x 530 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
House / Garden cleaning

Options

4.50 m suction hose



20KE

Characteristics

Max pressure:	150 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	415V 3-phase – cable 6 m – switch ON/OFF
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	84 kg 840 mm x 670 mm x 770 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
House / Garden cleaning

Options

4.50 m suction hose



30KE-AS

Characteristics

Max pressure:	207 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	415V 3-phase – cable 6 m – switch ON/OFF
Drive:	Direct
Feed:	Direct or suction feed
Suction hose:	Optional - 4.5 m of 3/4" suction hose fitted with suction strainer
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	155.5 kg 1110 mm x 750 mm x 770 mm

Applications

Industrial cleaning
Surface cleaning
Plant and vehicles cleaning

Options

4.50 m suction hose





Mobile petrol and diesel

20KPE

Characteristics

Max pressure:	140 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX200, pull start and low oil alert
Drive:	Industrial gearbox 2:1
Feed:	Direct or suction feed
Suction hose:	4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	67 kg 1085 mm x 600 mm x 670 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



20KLN+ES

Characteristics

Max pressure:	124 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Yanmar L48, electric start
Drive:	Industrial gearbox 2:1
Feed:	Direct or suction feed
Suction hose:	4.5 m of 1/2" suction hose fitted with suction strainer
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	85 kg 1085 mm x 600 mm x 670 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



30KLN+ES

Characteristics

Max pressure:	207 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Yanmar L100, electric start
Drive:	Triple V-belt drive
Feed:	Direct or suction feed
Suction hose:	4.5 m of 3/4" suction hose fitted with suction strainer
Delivery hose:	15 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	86 kg 1085 mm x 600 mm x 670 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning



35KPE

Characteristics

Max pressure:	240 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX390, pull start
Drive:	Triple V-belt drive
Feed:	Direct or suction feed
Suction hose:	4.5 m of 3/4" suction hose fitted with suction strainer
Delivery hose:	15 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	147 kg 1050 mm x 680 mm x 800 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



35KPE+ES


Characteristics

Max pressure:	240 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX390, electric start
Drive:	Triple V-belt drive
Feed:	Direct or suction feed
Suction hose:	4.5 m of 3/4" suction hose fitted with suction strainer
Delivery hose:	15 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	147 kg 1050 mm x 680 mm x 800 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



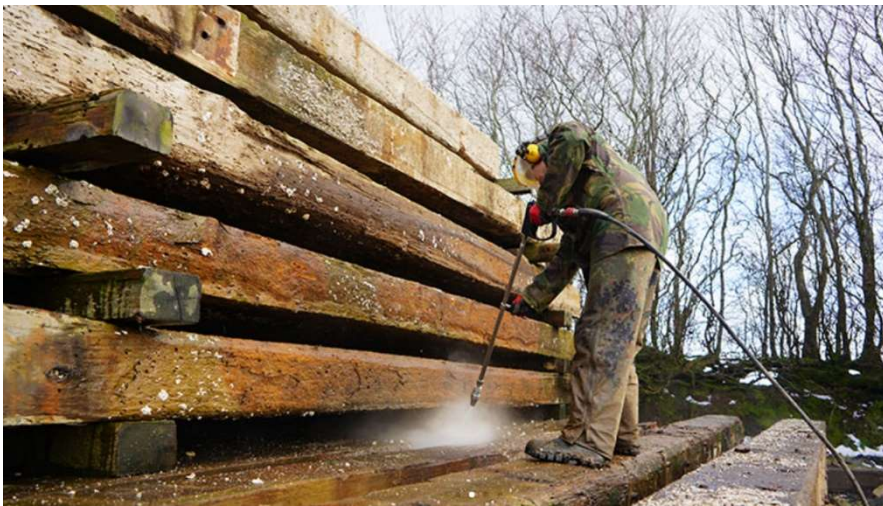

50KPE-VT

Characteristics

Max pressure:	350 BAR
Flow rate:	16 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX630 V-Twin, electric start
Drive:	Industrial gearbox
Feed:	Suction feed
Suction hose:	4.5 m of 3/4" suction hose fitted with suction strainer
Delivery hose:	30 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	175 kg 1170 mm x 950 mm x 1070 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



70KPE-VT

Characteristics

Max pressure:	500 BAR
Flow rate:	16 liters per minute
Pump:	Industrial pump Hawk
Engine:	Petrol Honda GX630 V-Twin, electric start
Drive:	Industrial gearbox
Feed:	Suction feed
Suction hose:	4.5 m of 3/4" suction hose fitted with suction strainer
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	180 kg 1170 mm x 950 mm x 1070 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning





Autonomous trolley

MBW20KPS

Characteristics

Max pressure:	140 BAR
Flow rate:	10 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX200, pull start with oil alert
Drive:	Industrial gearbox 2:1
Feed:	Water tank 125 l
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	105 kg 1470 mm x 850 mm x 1100 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



MBW20KDSB

Characteristics

Max pressure:	124 BAR
Flow rate:	10 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Yanmar L48, electric start
Drive:	Industrial gearbox 2:1
Feed:	Water tank 125 l
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	105 kg 1470 mm x 850 mm x 1100 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning





Cold water trailer

BBW20KPE

Characteristics

Max pressure:	140 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX200, pull start
Drive:	Industrial gearbox 2:1
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	415 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



BBW20KLN+ES

Characteristics

Max pressure:	124 BAR
Flow rate:	13.2 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Yanmar L48, electric start
Drive:	Industrial gearbox 2:1
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	10 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	485 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Light industrial cleaning
Car / vehicle cleaning
Surface cleaning



BBW30KLN+ES

Characteristics

Max pressure:	207 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Yanmar L100, electric start
Drive:	Triple V-belt drive
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	15 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	500 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Agriculture, agro industry



BBW35KPE+ES

Characteristics

Max pressure:	240 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX390, electric start
Drive:	Triple V-belt drive
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	15 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	500 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Agriculture, agro industry



BBW50KPE-VT

Characteristics

Max pressure:	350 BAR
Flow rate:	16 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX630 V-Twin, electric start
Drive:	Industrial gearbox 2:1
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	500 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Agriculture, agro industry



BBW70KPE-VT

Characteristics

Max pressure:	500 BAR
Flow rate:	15 liters per minute
Pump:	Industrial pump Hawk
Engine:	Petrol Honda GX630 V-Twin, electric start
Drive:	Industrial gearbox 2:1
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	500 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Agriculture, agro industry





Silent cold water trailer

BBW30KDQ+ES

Characteristics

Max pressure:	207 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Kubota Mini, electric start
Drive:	Triple V-belt drive
Noise:	70 dB(A) at 7 m – 78 dB(A) at 1 m
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	678 kg dry 3450 mm x 1510 mm x 1700 mm

Applications

Industrial cleaning
 Surface cleaning
 Plant cleaning
 Municipal cleaning
 Agriculture, agro industry



BBW40KDQ+ES

Characteristics

Max pressure:	280 BAR
Flow rate:	15 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Kubota Mini, electric start
Drive:	Triple V-belt drive
Noise:	70 dB(A) at 7 m – 78 dB(A) at 1 m
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	678 kg dry 3450 mm x 1510 mm x 1700 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Agriculture, agro industry



BBW50KDQ+ES

Characteristics

Max pressure:	350 BAR
Flow rate:	13.5 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Kubota Mini, electric start
Drive:	Triple V-belt drive
Bruit :	70 dB(A) at 7 m – 78 dB(A) at 1 m
Feed:	Tanks 940 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	678 kg dry 3450 mm x 1510 mm x 1700 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Agriculture, agro industry





Hot water trailer

HWBBW35KPE+ES

Characteristics

Max pressure:	240 BAR
Flow rate:	12.5 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX390, electric start
Drive:	Triple V-belt drive
Température :	80°C
Feed:	Tanks 700 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	800 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
 Surface cleaning
 Plant cleaning
 Municipal cleaning
 Graffiti, oils
 Agriculture, agro industry



HWBBW35KLN+ES

Characteristics

Max pressure:	240 BAR
Flow rate:	12.5 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Diesel Yanmar L100N, electric start
Drive:	Triple V-belt drive
Température :	80°C
Feed:	Tanks 700 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	800 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Graffiti, oils
Agriculture, agro industry



HWBBW50KPE-VT

Characteristics

Max pressure:	345 BAR
Flow rate:	12.5 liters per minute
Pump:	Heavy Duty triple piston CAT pump
Engine:	Petrol Honda GX630 V-Twin, electric start
Drive:	Triple V-belt drive
Température :	80°C
Feed:	Tanks 700 l water, 28 l detergent, 15 l anti-freeze
Delivery hose:	20 m of 3/8" double braided hose fitted with couplings and lance 1 m
Weight and dimensions:	800 kg dry 3450 mm x 1510 mm x 1350 mm

Applications

Industrial cleaning
Surface cleaning
Plant cleaning
Municipal cleaning
Graffiti, oils
Agriculture, agro industry



Accessories



Surface cleaning MRJET25

This accessory equipped with two nozzles on a rotating arm allows you to quickly clean large surfaces, with its working width of 520 mm. It can be used with cleaners from 140 to 276 BAR.

Weighing 12 kg, it is easily maneuverable with its four casters. A retention skirt helps prevent the projection of debris.



Spraying system DT400

The DT400, on a 50 kg mobile chassis, works with cleaners with a maximum pressure of 250 BAR, up to 75 m from the cleaner.

It allows spraying of water droplets at a flow rate of 4 to 8 liters minutes, with an adjustable angle from 0 to 42°.

The water cloud helps to reduce dust and reduce odors.



Sandblasting kit ISKSB2300

The sandblasting kit allows the suction of a dry abrasive mixed with water at high pressure for rust or paint removal and surface preparation, with cleaners of 200 BAR and above.

Several abrasives (iron silicate, glass powder, calcium and sodium bicarbonate) can be used depending on the nature of the work.



Drain jetting kit 30KITLD

The drain jetting kit allows the cleaning of pipes thanks to its 30 m cleaning hose, equipped with a multidirectional nozzle (one front jet and six rear jets to evacuate debris). Used with 140 to 276 BAR cleaners, it is suitable for 4" to 6" pipes, and up to 8" pipes on shorter lengths.



Hot water **HOTBOX**

The HOTBOX allows you to transform your equipment into a hot water cleaner, for cleaning hydrocarbons, urban or agricultural applications, or weeding.

The HOTBOX can heat water up to 120°C, for cleaners from 100 to 207 BAR.

It is equipped with a 10 m double braided hose, and an 18 l fuel tank.



Sludge pumping **GULPER**

The GULPER kit transforms your cleaner into a sludge pump, which allows you to suck water from ponds, basins, cellars, etc. The kit has no moving parts and works by Venturi effect to pump liquids and solids up to at 25 mm and up to 8 meters in height, with a flow rate of 8000 to 18000 liters per hour depending on the cleaner.

The kit is equipped with a 5 m pumping hose.



Water tank **WATER BUDDY BWB100**

This 100 liters tank is an interesting addition to portable and mobile cleaners. The integrated ball valve prevents unnecessary water overflow. Simply connect your power hose and it's ready to use.

With a dry weight of 23.5 kg, it is easily movable thanks to its two wheels.



Fuel tank **DIESEL BUDDY BDB70**

Another interesting addition for portable and mobile cleaners, or other small construction equipment.

Its capacity is 70 liters and it is equipped with a 1.5 m delivery hose with nozzle and locking trigger. With a dry weight of 33.5 kg, it is easily movable thanks to its two wheels.



Other accessories:



Reels and hoses

We offer 50 m and 75 m hose reels and rear trailer reels, as well as 10, 15, 20, 30 and 50 meter double braided hoses with their fittings.



Telescopic lances 5 m and 7 m



Small diameter surface cleaner



Skid chassis



DT400 on trailer rear frame



Lifting point for forklift



Weather protection engine and lance



Spray bar for dust suppression



Whale tail for dust suppression



Anti-theft security: wheel clamp, hitch locks and bolts



MCEP DISTRIBUTION



Drilling



Blasting



Ground engaging tools – Wear material



Powerwashers



Specific products



MCEP DISTRIBUTION – 3 rue du Prélôt
25340 L'HOPITAL SAINT-LIEFFROY



www.mcep-distribution.com



Commercial:	commercial@mcep-distribution.com	+33 7 71 24 21 58
Technical:	eric.petit@mcep-distribution.com	+33 6 26 49 69 20
Administrative:	admin@mcep-distribution.com	+33 6 48 00 66 08



Société par actions simplifiée with a capital of 30 000 € - RCS BESANCON B 807 572 326

The publisher reserves the right to printing errors, changes in laws
and regulations and possible product modifications.

© 2024 MCEP DISTRIBUTION